



Thank you for purchasing our product. Before installing/operating the product, read the instructions carefully and retain them for future reference.

⚠ Attention!




- For installation, follow the steps described. Any damage caused by wrong installation shall be imputed to the users.
- To avoid a short circuit from occurring do not pull or modify the wires during installation.
- Do not disassemble or change any parts. Opening and dissassembling this unit will void any warranty.
- Maintenance and repairs should be executed by our professionals only.

NOTE


⚠ Some procedures must be followed to avoid damages to the product.

⚠ WARNING! Certain procedure must be followed to avoid damages to yourself, to the vehicle or to others.

1 ACCESSORIES



2 SPECIFICATIONS

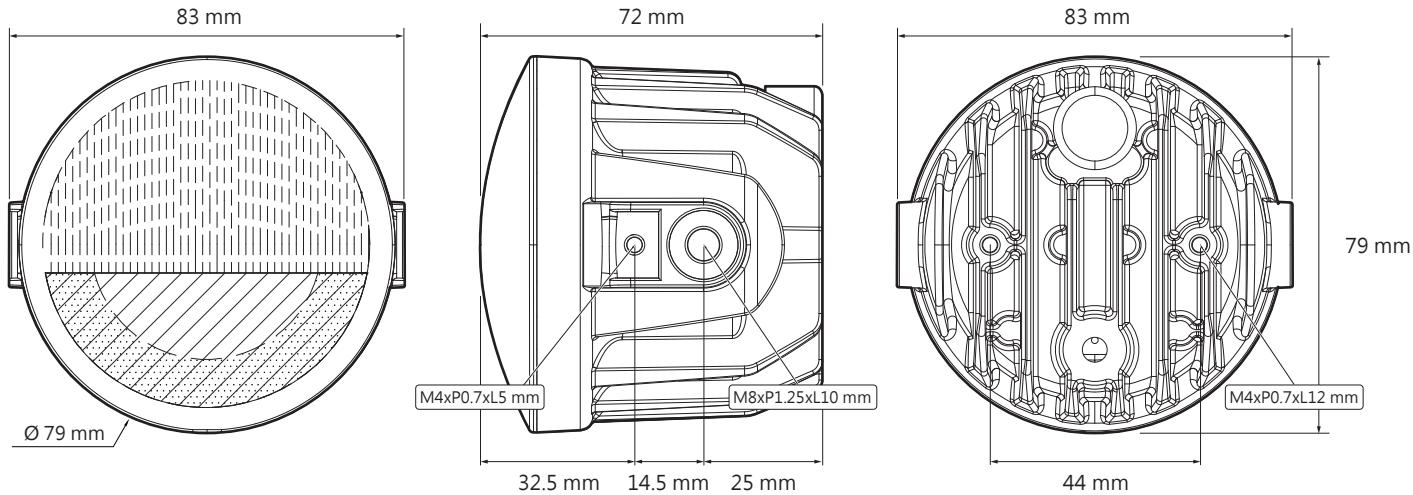

● Effective temperature range -10 ~ 60 °C

● Standard JIS D 0203

● Homologation E-Mark / SAE Approved

● Size 83 X 79 X 72 mm

● Effective voltage DC 10 ~ 16 V


● Low beam DC 12V / 13.6 W

● High beam DC 12V / 24.8 W


● Weight ±305 g

NOTE Design and specifications are subject to change without notice.


3 WIRING INSTALLATION INSTRUCTIONS

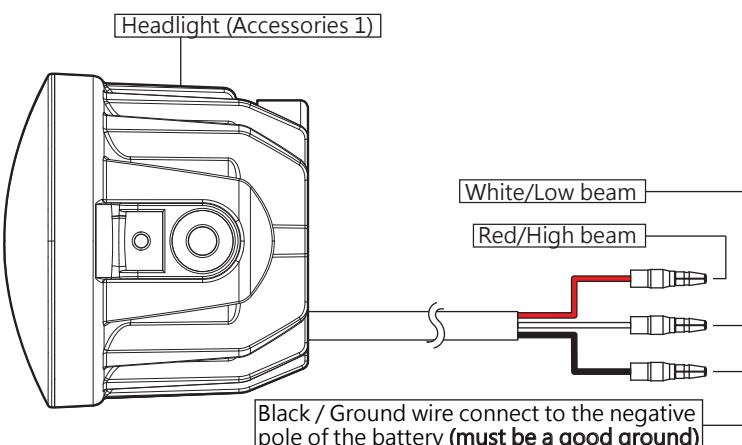

NOTE If the OEM connector from your motorcycle is H4 / 3 pins, you will need to use the adapter harness.

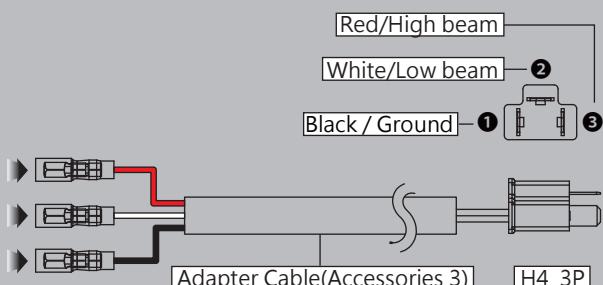

4 WIRING INSTALLATION INSTRUCTIONS

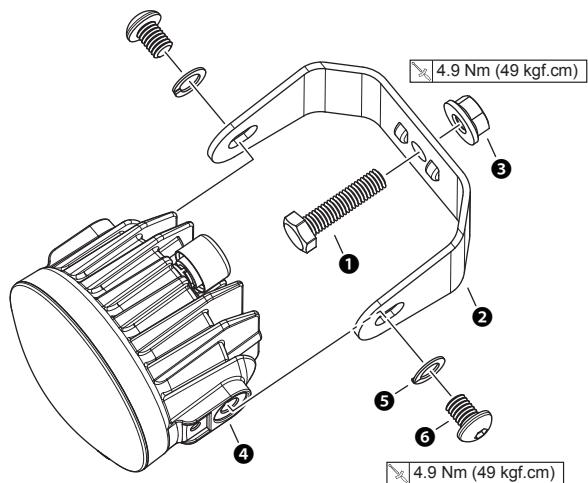

Follow the steps below during installation.

1. M8 Bolt (Accessories 6)
2. Bracket (Accessories 2)
3. M8 Nut (Accessories 7) \times 4.9 Nm (49 kgf.cm)
4. Headlight (Accessories 1)
5. M8 Lock Washer (Accessories 5)
6. M8 Allen screw (Accessories 4) \times 4.9 Nm (49 kgf.cm)

5 TROUBLESHOOTING

The following situations do not indicate malfunctions of the product. Check the following before taking it in for repair.

Trouble	Check item
No LED indicator lighting up.	<ul style="list-style-type: none">● Power supply cable may be disconnected. → Check if power supply cable is broken or disconnected. → Check if positive and negative poles are properly connected.

※ If the problems still cannot be solved, contact our technical department for assistance.