



Thank you for purchasing our product. Before installing/operating the product, read the instructions carefully and retain them for future reference.

⚠ Attention!



- For installation, follow the steps described. Any damage caused by wrong installation shall be imputed to the users.
- To avoid a short circuit from occurring do not pull or modify the wires during installation.
- Do not disassemble or change any parts. Opening and disassembling this unit will void any warranty.
- Maintenance and repairs should be executed by our professionals only.

Symbol description:




NOTE

⚠ Some procedures must be followed to avoid damages to the product.

⚠ **WARNING!** Certain procedure must be followed to avoid damages to yourself, to the vehicle or to others.



1 Accessories




2-1 Installation instructions




Scan the QR code for installation instructions.

2-2 Wiring installation instructions

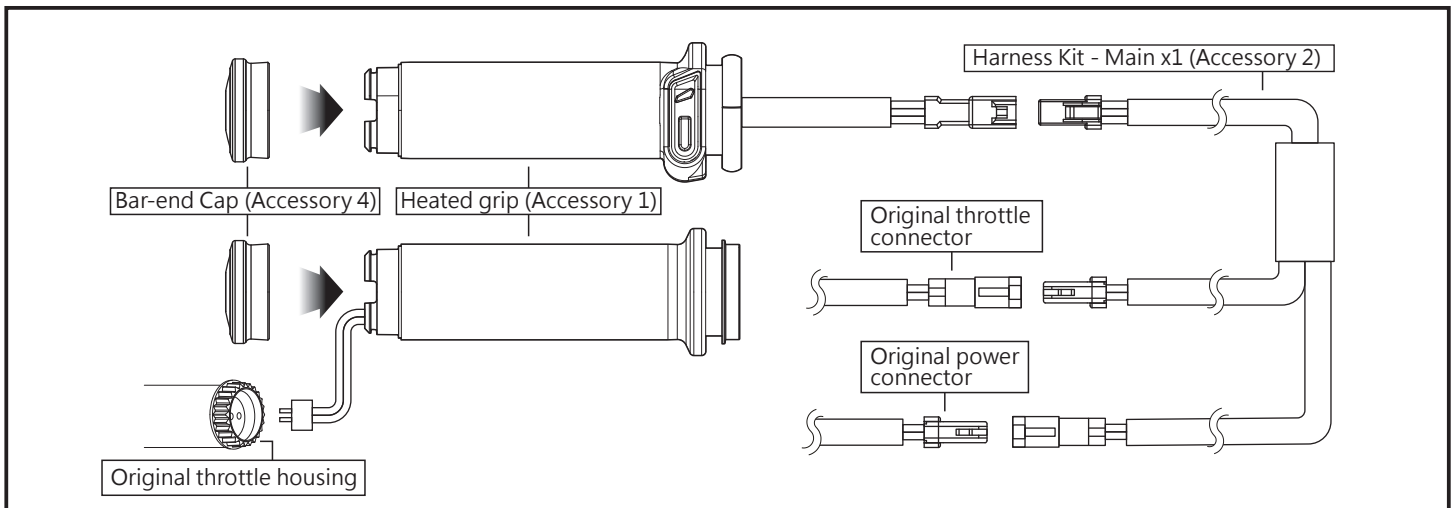

3 Heating Function Instruction

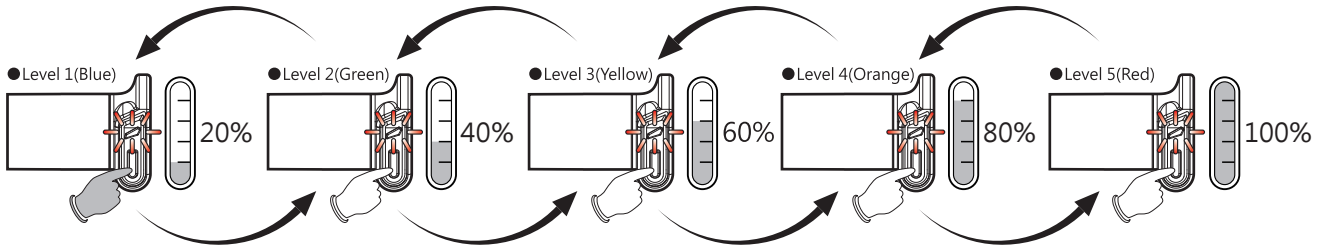


- Hold the button : On / Off
Default value : Level 1
- Button once : Refer to above diagram to switch the heating level accordingly.

NOTE It is under off mode and no heating and no light flash if the button is not pressed.

Press and hold the button to turn the heated grips off at any level.


The grips feature a memorizing function which means no matter what level they were shut down on, they will restore to the previous level once turned back on.

4 Titan-II Heated Grip Testing Data

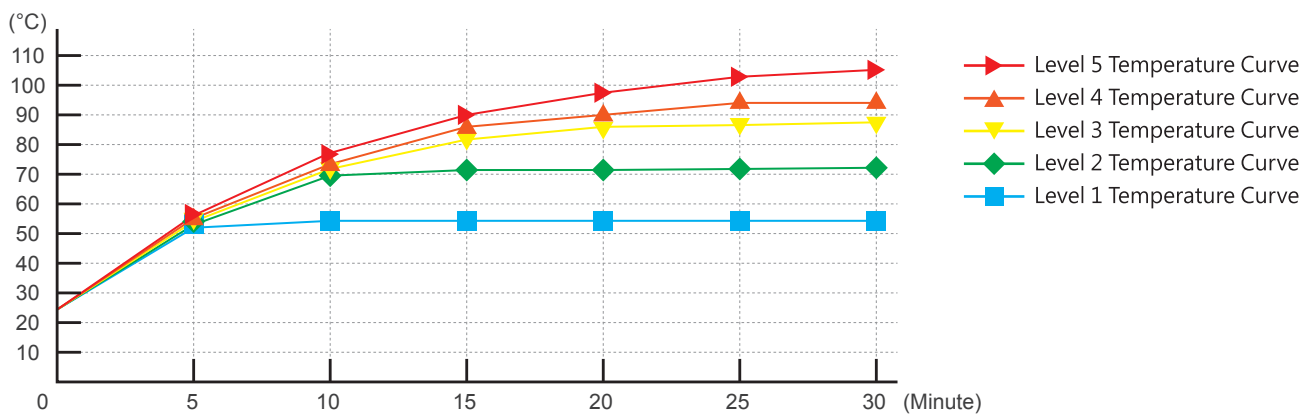

NOTE The testing environment is under 26 Degrees Celsius, with a working voltage of 13.5V.

5 Low Battery Warning Instruction



On (low voltage)

- Low Battery Warning Activate Condition : When voltage is lower than 11.5 V for more than 5 seconds.
- Heating Output : Turn-Off
- Indicator : Red Light Flashing
- Hold the button / Press button once : Turn-Off

Off (low voltage)

- Low Battery Warning Activate Condition : When voltage is lower than 11.5 V for more than 5 seconds.
- Heating Output : Turn-Off
- Indicator : No light
- Hold the button until red indication light flashes three times to switch off the product.

NOTE Condition to Restore Normal Status : Detected voltage higher than 12.5V for more than 2 seconds.

6 Caution



- Do not push the rubber part too hard, it might cause damaged the grips.

7 Troubleshooting

The following situations do not indicate malfunctions of the product. Check the following before taking it in for repair.

Trouble-1	Check item
No LED indicator lighting up.	<ul style="list-style-type: none"> ● Could be due to an improper connection between the connectors. → Check each connector to confirm the connection. ● Could be the fuse was burnt. → Replace the 4A fuse with a Terminal Car Fuse.

※ If the problems still cannot be solved, contact our technical department for assistance.

wh20ax011a